



VM-based Setup on Azure

Virsec Security Platform 2.6

www.virsec.com
support@virsec.com

Contents

About this Document	3
1. Azure Machine Creation	3
2. Installation.....	8

About this Document

This document provides information about Docker and Docker Compose Installation on Azure VM. Two Virtual machines are required for VSP – one for VSP CMS and one for VSP AE (Remote AE only)


The pre-requisites for VSP installation:

1. Virtual machine with:
 - a. Docker
 - b. Docker Compose
 - c. Network Security Group with the list of ports utilized by VSP components. Refer to the VM Installation Checklist for information on the ports

This document provides steps for the Azure environment setup

1. Azure Machine Creation

1. Access the Azure Virtual machines console and click **Virtual machines**

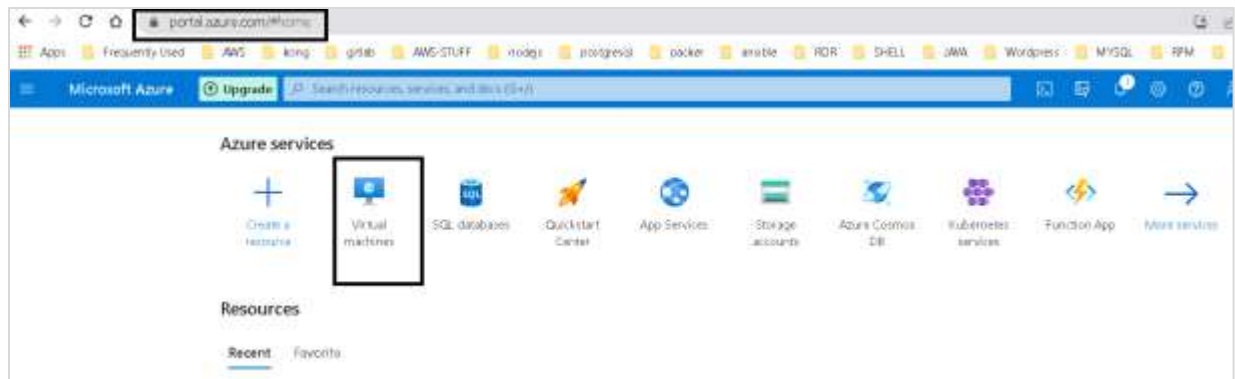

2. Navigate to **Virtual machines > Create > Azure virtual machine**



3. Provide the required information:
 - a. **Subscription:** Free Trial/pay-as-you-go
 - b. **Resource group:** If there is no existing resource group, create a new one
 - c. **Virtual machine name:** Custom name for the VM
 - d. **Region:** Provide the Custom region
 - e. **Availability Zone:** Select the appropriate Availability Zone

- f. **Security Type:** Standard
- g. **Image:** RHEL 8.2 – Gen2
- h. **Size:** Select the below option according to the CMS Deployment Type:
 - i. Large: **standard_D16s_v3 (vcpu -16 Memory-64GiB)**
 - ii. Small: **standard_D8s_v3 (vcpu -8 Memory-32GiB)**

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription *

Resource group *

Create a virtual machine

Subscription *

Resource group *

Instance details

Virtual machine name *

Region *

Availability options

Availability zone *

Security type

Image *

Run with Azure Spot discount

Size *

- i. **Authenticate Type:** Select **Password**. Provide the **username** and **password**

Create a virtual machine

Administrator account

Authentication type SSH public key Password

Username *

Password *

Confirm password *

Inbound port rules

Select which virtual machine network ports are accessible from the public internet. You can specify more limited or granular network access on the Networking tab.

Public inbound ports * None Allow selected ports

Select inbound ports *

Warning: This will allow all IP addresses to access your virtual machine. This is only recommended for testing. Use the Advanced controls in the Networking tab to create rules to limit inbound traffic to known IP addresses.

- j. Enable SSH protocol to access the VM. Click **Next: Disks**

Select inbound ports * :SSH(22)

⚠ This will allow all IP addresses to access your virtual machine. This is only recommended for testing. Use the Advanced controls in the Networking tab to create rules to limit inbound traffic to known IP addresses.

Licensing

If you have eligible Red Hat Enterprise Linux subscriptions that are enabled for Red Hat Cloud Access, you can use Azure Hybrid Benefit to attach your Red Hat subscriptions to this VM and save money on compute costs. [Learn more of](#)

Your Azure subscription is currently not a part of Red Hat Cloud Access. In order to enable RHEL for this VM, you must add this Azure subscription to Cloud Access. [Learn more of](#)

[Review & create](#) [< Previous](#) **Next: Disks >**

- k. Configure **OS Disk type** and **Encryption type**. Click **Create and attach a new disk**

Create a virtual machine

Disk options

OS disk type *

Delete with VM

Enable encryption at host

i Encryption at host is not registered for the selected subscription. [Learn more about enabling this feature](#)

Encryption type *

Enable Ultra Disk compatibility

Data disks for appcert-dockercompose

You can add and configure additional data disks for your virtual machine or attach existing disks. This VM also comes with a temporary disk.

LUN	Name	Size (GiB)	Disk type	Host caching	Delete with VM
-----	------	------------	-----------	--------------	----------------

Create and attach a new disk [Attach an existing disk](#)

l. Configure **Name, Source Type** and **Size**. Click **OK**

Create a new disk

Create a new disk to store applications and data on your VM. Disk pricing varies based on factors including disk size, storage type, and number of transactions. [Learn more](#)

Name*

Source type*

Size*

Encryption type*

Enable shared disk Yes No

Delete disk with VM

OK

m. After Configuring disk, click **Next: Networking**

Create a virtual machine

Enable encryption at host

Encryption type*

Enable Ultra Disk compatibility

Data disks for appcert-dockercompose

You can add and configure additional data disks for your virtual machine or attach existing disks. This VM also comes with a temporary disk.

LUN	Name	Size (GiB)	Disk type	Host caching	Delete with VM
0	appcert-dockercompos...	128	Premium SSD LRS	Read-only	<input checked="" type="checkbox"/>

Create and attach a new disk [Attach an existing disk](#)

Advanced

Review + create

n. Select the default values and click **Management**

- o. Click **Tags** and provide the tags for identification. Click **Review + Create**

Create a virtual machine

Basics Disks Networking Management Advanced **Tags** Review + create

Tags are name/value pairs that enable you to categorize resources and view consolidated billing by applying the same tag to multiple resources and resource groups. [Learn more about tags](#)

Note that if you create tags and then change resource settings on other tabs, your tags will be automatically updated.

Name	Value	Resource
<input type="text" value="Name"/>	<input type="text" value="appoert-dobar-compose"/>	12 selected
<input type="text"/>	<input type="text"/>	12 selected

Review + create < Previous Next: Review + create >

4. After validation, click **Create** to provision the VM
5. After a successful VM creation, click **Go to resource**

CreateVm-RedHat.RHEL-82gen2-20220805192809 | Overview

Deployment

Search (Ctrl+F)

Delete Cancel Redeploy Refresh

Give us your feedback

Your deployment is complete

Deployment name: CreateVm-RedHat.RHEL-82gen2-20220805192809 Start time: 8/5/2022, 7:54:41 PM
 Subscription: [redacted] Correlation ID: 7770582e-1979-4638-b05c-0996c6c19c5c

Resource group: appoert-rg

Deployment details (Download)

Next steps

- Setup auto-start/stop: Recommended
- Monitor VM health, performance and network dependencies: Recommended
- Run a script inside the virtual machine: Recommended

Go to resource Create another VM

6. Copy the Public IP address and login to the machine using MobaXterm/CLI

2. Installation

1. Log in to the two newly created machines using SSH and install Docker and Docker Compose using the commands below:
 - a. `sudo su`
 - b. Register the machine with the Red Hat subscription to download dependencies
 - i. `subscription-manager register --username username --password password --auto-attach`
 - c. `yum update`
 - d. `subscription-manager repos --enable=rhel-7-server-rpms --enable=rhel-7-server-extras-rpms --enable=rhel-7-server-optional-rpms`
 - e. `sudo yum install -y https://dl.fedoraproject.org/pub/epel/epel-release-latest-7.noarch.rpm`
 - f. `sudo yum install -y yum-utils device-mapper-persistent-data lvm2`
 - g. `sudo yum-config-manager --add-repo https://download.docker.com/linux/centos/docker-ce.repo`
 - h. `sudo yum install docker-ce`
 - i. `sudo systemctl enable --now docker.service`
 - j. `sudo curl -L "https://github.com/docker/compose/releases/download/1.23.2/docker-compose-$(uname -s)-$(uname -m)" -o /usr/local/bin/docker-compose`
 - k. `sudo chmod +x /usr/local/bin/docker-compose`
 - l. `mv /usr/local/bin/docker-compose /usr/bin/`
2. Verify the docker and docker compose versions using the commands:
 - a. `docker version #verify docker version`
 - b. `docker-compose version #verify docker compose version`



NOTE:

To enable custom ports for network security, click **Networking** and add inbound port rule so that VM allows inbound traffic for specified ports.

-- END OF DOCUMENT --